

OCEAN[®] CHAIN HOISTS

RELIABLE MANUAL LIFTING FOR EVERYDAY DEMANDS

HIGH-STRENGTH STEEL BODY AND GEAR HOUSING

Exceptional durability and long service life, even under heavy-duty use.

OVERLOAD PROTECTION: INTEGRATED MECHANICAL OVERLOAD PROTECTION

Prevents damage caused by excessive loading, ensuring product and operator safety.

INVOLUTE SPLINES CONNECT BRAKE SEAT AND DRIVING SHAFT

Stronger brake effect and parts are easy to disassemble for maintenance or repair.

BLACK ELECTROPHORESIS 680 CHAIN

Enhanced resistance to corrosion and reliable lifting performance.

COMPACT, ERGONOMIC DESIGN: REDUCED WEIGHT AND BALANCED FRAME

Easy handling, transport, and positioning in tight spaces.



OPENING STYLE COVER WITH CURVED EDGE

Easy hand chain replacement and smooth operation.

PRECISION-MACHINED COMPONENTS

Smooth operation, reduced wear, and max load efficiency.

ANTI-CORROSION FINISHES

Superior rust protection, extending lifespan in humid or outdoor environments.

DUAL PAWL BRAKE SYSTEM: INDEPENDENT 2XPAWL MECHANISM

Secure load holding and improved safety during lifting and lowering operations.

TESTED TO ANSI/ASME STANDARDS

Engineered for reliability in North America market.

CAPACITY 0.5-10 TON OPTIONS

Suited for general use and everyday applications.


360° SWIVEL HOOKS: HEAT-TREATED TOP AND BOTTOM HOOKS WITH CAST SAFETY LATCHES

Flexible handling and prevent twisting of the load chain during operation.

OCEAN®

RIGGING HARDWARE & PRODUCTS

Engineered to perform in the most demanding lifting environments.

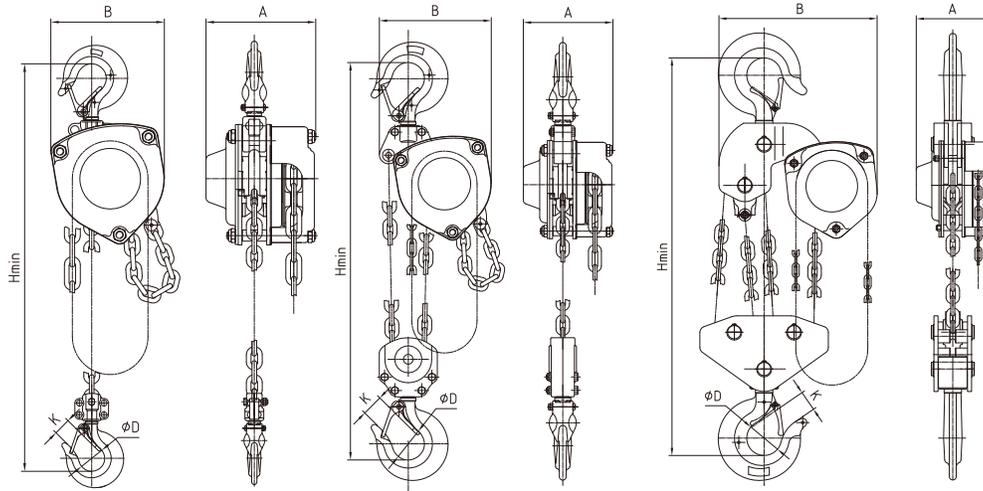

OCN-CH 0.5T-2.0T

OCN-CH 3.0T-5.0T

OCN-CH 10T

Chain Lengths:

10', 15', 20', No Chain

Certifications:

ANSI / ASME Standards

Country of Origin:

China

Color:

Yellow

Power:

Manual

Warranty:

2 yrs

Ocean® Brand Chain Hoist Capacities (tons)

| | 0.5T | 1.0T | 1.5T | 2.0T | 3.0T | 5.0T | 10T |
|--|--|--------------|--------------|--------------|--------------|--------------|-------------|
| Model | OCN-CH0.5 | OCN-CH1.0 | OCN-CH1.5 | OCN-CH2.0 | OCN-CH3.0 | OCN-CH5.0 | OCN-CH10 |
| Capacity (lbs.) | 1100 | 2200 | 3300 | 4400 | 6600 | 11000 | 22000 |
| Dimensions (in.) | A | 5.04 | 5.45 | 6.34 | 6.34 | 6.34 | 7.64 |
| | B | 4.80 | 5.83 | 6.89 | 6.89 | 9.13 | 15.12 |
| | H-min | 11.61 | 13.58 | 16.14 | 16.97 | 16.30 | 31.42 |
| | D | 1.38 | 1.57 | 1.77 | 2.05 | 2.17 | 3.35 |
| | K | 0.87 | 1.02 | 1.14 | 1.38 | 1.54 | 2.28 |
| Net Weight (with 10' of chain) | 16.98 | 24.47 | 36.82 | 38.80 | 54.67 | 86.42 | 184.97 |
| Load Chain (mm) | 5X15 | 6X18 | 8X24 | 8X24 | 10X30 | 10X30 | 10X30 |
| Strands of Load Chain (#) | 1 | 1 | 1 | 1 | 2 | 2 | 4 |
| Effort Required to Lift Rated Load (lbf.) | 47.21 | 66.99 | 82.73 | 96.67 | 85.2 | 103.41 | 109.71 |
| Strands Lift | Depends on selected chain length: No Chain, 10 ft., 15 ft., or 20ft. | | | | | | |
| SKU by Chain Length | No Chain | OCN-CH0.5NC | OCN-CH1.0NC | OCN-CH1.5NC | OCN-CH2.0NC | OCN-CH3.0NC | OCN-CH10NC |
| | 10' Chain | OCN-CH0.5-10 | OCN-CH1.0-10 | OCN-CH1.5-10 | OCN-CH2.0-10 | OCN-CH3.0-10 | OCN-CH10-10 |
| | 15' Chain | OCN-CH0.5-15 | OCN-CH1.0-15 | OCN-CH1.5-15 | OCN-CH2.0-15 | OCN-CH3.0-15 | OCN-CH10-15 |
| | 20' Chain | OCN-CH0.5-20 | OCN-CH1.0-20 | OCN-CH1.5-20 | OCN-CH2.0-20 | OCN-CH3.0-20 | OCN-CH10-20 |