

OCEAN[®] LEVER CHAIN HOIST

RELIABLE MANUAL LIFTING

ENGINEERED FOR EVERYDAY WORK

COMPACT AND DURABLE CONSTRUCTION WITH HIGH-STRENGTH STEEL FRAME

Long-term reliability and high load-bearing capability.

CORROSION-RESISTANT BODY

Long service life even in harsh environments.

BLACK ELECTROPHORESIS G80 CHAIN

Reliable lifting with enhanced corrosion resistance

PRECISION GEAR MECHANISM

Smooth, controlled lifting and lowering with reduced manual effort.

HEAT TREATED ALLOY STEEL HOOKS WITH SAFETY LATCHES

Swivel design prevents twisting and ensures safe, easy load attachment.

BONDED BRAKE ASSEMBLY

Stable performance, reduced wear, consistent load control in all working conditions.

OVERLOAD PROTECTION

Prevents accidental overloading, protecting both user and hoist mechanism.

BRAKE SEAT AND DRIVING SHAFT CONNECTED BY INVOLUTE SPLINES

Strong braking performance and easy disassembly.

COMPACT AND HIGHER STRENGTH LEVER

Enhanced maneuverability in confined spaces.

ERGONOMIC RUBBER GRIP

Designed for operator comfort and secure handling during prolonged use.

FREEWHEEL FUNCTION

Allows quick load chain adjustment for fast setup and efficient operation.

TESTED TO ANSI/ASME STANDARDS

Engineered for reliability in North America market.

CAPACITY 0.8-9 TON OPTIONS


Suited for general use and everyday applications.




OCEAN®

RIGGING HARDWARE & PRODUCTS


Engineered to perform in the most demanding lifting environments.

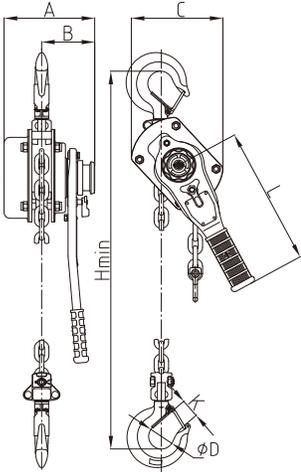


OCN-LH 0.8T

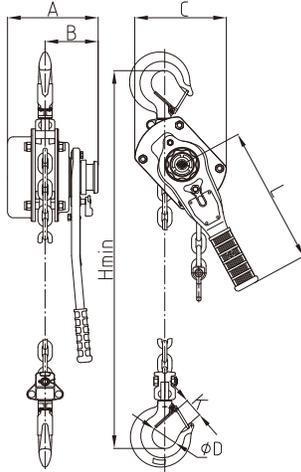

OCN-LH 1.6T-3.2T

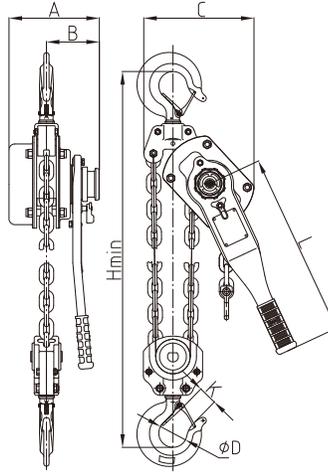

OCN-LH 6.3T

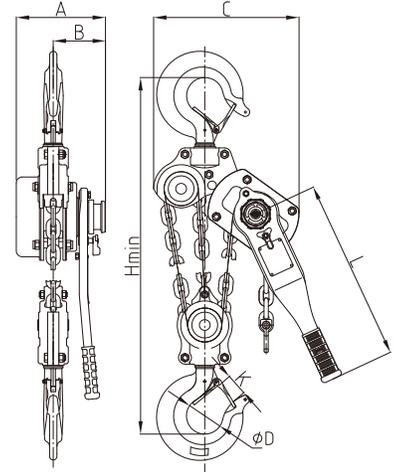

OCN-LH 9.0T

Ocean® Brand Lever Hoist Capacities (tons)

	0.8T	1.6T	3.2T	6.3T	9.0T	
Model	OCN-LH0.8	OCN-LH1.6	OCN-LH3.2	OCN-LH6.3	OCN-LH9.0	
Capacity (lbs.)	1700	3500	7000	13800	19800	
Dimensions (in.)	A	6.3	7.71	8.17	8.17	
	B	3.94	4.29	4.8	4.8	4.8
	C	5.27	6.18	8.27	9.96	13.31
	D	1.57	1.77	2.17	2.68	3.35
	H-min	12.6	14.37	19.29	22.83	32.68
	L	9.84	10.63	16.93	16.93	16.93
	K	1.02	1.14	1.54	1.69	2.28
Net Weight (with 10' of chain)	15.65	23.81	51.37	78.48	92.37	
Load Chain (mm)	6x18	8x24	10x30	10x30	10x30	
Strands of Load Chain (#)	1	1	1	2	3	
Strands Lift	Depends on selected chain length: No Chain, 5 ft. 10 ft., 15 ft., or 20 ft.					
Effort Required to Lift Rated Load (lbf.)	44.96	79.81	75.31	78.68	72.61	
SKU by Chain Length	No Chain	OCN-LH0.8-NC	OCN-LH1.6-NC	OCN-LH3.2-NC	OCN-LH6.3-NC	OCN-LH9.0-NC
	5' Chain	OCN-LH0.8-05	OCN-LH1.6-05	OCN-LH3.2-05	OCN-LH6.3-05	OCN-LH9.0-05
	10' Chain	OCN-LH0.8-10	OCN-LH1.6-10	OCN-LH3.2-10	OCN-LH6.3-10	OCN-LH9.0-10
	15' Chain	OCN-LH0.8-15	OCN-LH1.6-15	OCN-LH3.2-15	OCN-LH6.3-15	OCN-LH9.0-15
	20' Chain	OCN-LH0.8-20	OCN-LH1.6-20	OCN-LH3.2-20	OCN-LH6.3-20	OCN-LH9.0-20

Chain Length Options:

- 5 feet
- 10 feet
- 15 feet
- 20 Feet
- No Chain

Color:
Yellow

Power:
Manual

Country of Origin:
China

Certifications:
ANSI / ASME

Warranty:
2 yrs